



DECLARATION OF CE CONFORMITY


For the product:

Catalog Item: I15XT

Description: L-ACOUSTICS® I15XT
loudspeaker enclosure

Dimensions: 580 mm x 440 mm x 474 mm
(H x W x D)

Material: Baltic birch plywood
with external steel rigging plates

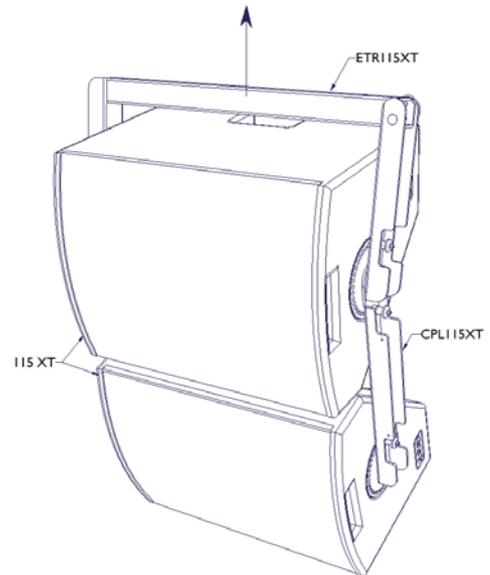

Optional accessories:

- Rigging accessory – ETRI15XT
- Rigging accessory – CPLI15XT (2 pieces)
- Rigging accessory – XTLIFTBAR
- Rigging accessory – PION2

Product Origin

Country of origin of the product: France
Country of origin for components of the product: EEC

Technical Specifications:

The I15XT loudspeaker enclosure is intended for overhead suspension horizontally or vertically when using the ETRI15XT rigging accessory, or vertically when using the XTLIFTBAR rigging accessory. Up to 2 I15XT loudspeakers can be suspended vertically (horizontal orientation) using 1 ETRI15XT and the CPLI15XT.

The following chart indicates the safety factor when using the I15XT loudspeaker according to the conditions described in the L-ACOUSTICS XT LINE I12XT I15XT OPERATOR MANUAL Version 1.1 or later:

	I15XT	ETRI15XT	CPLI15XT	XTLIFTBAR
Weight	29.5 Kg / 65 lbm	5.5 Kg / 12 lbm	1.75 Kg / 3.9 lbm	0.55 Kg / 1.2 lbm
WLL	32.5 daN / 73 lbf	61.5 daN / 138 lbf	14.5 daN / 33 lbf	30 daN / 67.5 lbf
Ultimate Strength Safety Factor	> 12	> 12	> 12	> 12

L-ACOUSTICS

13, Rue Levacher - Cintrat
Parc de la Fontaine de Jouvence
91462 Marcoussis - cedex
France
Tél : +33 (0)1 69 63 69 63
Fax : +33 (0)1 69 63 69 64
<http://www.l-acoustics.com>
e-mail : info@l-acoustics.com

S.A.S. au capital de 232 500 €
330 596 800 RCS EVRY
TVA (VAT) : FR 41330596800




Standards conformity

I15XT loudspeaker enclosures are designed to be suspended using the rigging accessory ETRI15XT horizontally or vertically. The ETRI15XT can be attached to an appropriate support using 1, 2 or all 3 of the 11 mm diameter holes on the main bracket.

2 x I15XT can be suspended vertically in the horizontal orientation from a single rigging point using one ETRI15XT and the CPLI15XT.

1 x I15XT loudspeaker can be suspended in the vertical orientation using the XTLIFTBAR and a single rigging point.

The recessed, side-mounted fly track sections on the I15XT loudspeaker can be used with the PION2 double stud fitting to ring accessory for safety attachment to the I15XT. This secondary rigging point shall not be used as the main rigging point. One PION2 is capable of withstanding the weight of one I15XT with an ultimate safety factor of 12.

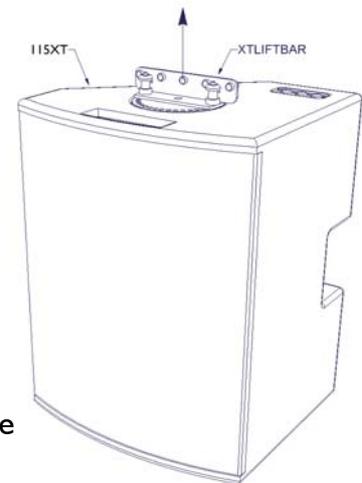

L-ACOUSTICS has engineered the I15XT and its rigging accessories using state of the art modeling and calculation software. The ETRI15XT, the CPLI15XT and the XTLIFTBAR rigging accessory were also destructively tested to validate the final design using a pulling bench equipped with laboratory calibrated measuring cells.

L-ACOUSTICS hereby declares that the above products conform to:

1. **The Machinery Directive 98/37/CE**, Part 4: Lifting Accessories
2. **Low Voltage Directive 73/23/CE** (harmonized standard EN60065).

Established at Marcoussis, France, on the 19th of February, 2004

Signature of L-ACOUSTICS representative:

A handwritten signature in black ink, appearing to read "J. Spillmann".

Jacques Spillmann
Chief Engineer - Manufacturing