



DECLARATION OF CE CONFORMITY


For the product:

Catalog Item: MTDI 15b

Description: L-ACOUSTICS® MTDI 15b
loudspeaker enclosure

Dimensions: 580 mm x 440 mm x 474 mm
(H x W x D)

Material: Baltic birch plywood with
built-in threaded rigging inserts

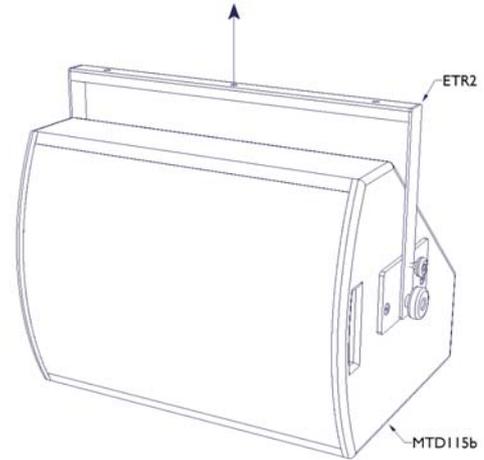

Optional accessories:

Rigging accessory – ETR2

Rigging accessory – PION I

Product Origin

Country of origin of the product: France

Country of origin for components of the product: EEC

Technical Specifications:

The MTDI 15b loudspeaker enclosure is intended for overhead suspension in the horizontal orientation when using the ETR2 rigging accessory.

The following chart indicates the safety factor when using the MTDI 15b loudspeaker according to the conditions described in the L-ACOUSTICS MTD LINE OPERATOR MANUAL Version 1.1 or later:

	MTDI 15b	ETR2
Weight	31.5 Kg / 69.5 lbm	4 Kg / 8.8 lbm
WLL	-	31.5 daN / 71 lbf
Ultimate Strength Safety Factor	> 12	

L-ACOUSTICS

13, Rue Levacher - Cintrat
Parc de la Fontaine de Jouvence
91462 Marcoussis - cedex
France
Tél : +33 (0)1 69 63 69 63
Fax : +33 (0)1 69 63 69 64
<http://www.l-acoustics.com>
e-mail : info@l-acoustics.com

S.A.S. au capital de 232 500 €
330 596 800 RCS EVRY
TVA (VAT) : FR 41330596800



Standards conformity

MTDI 15b loudspeaker enclosures are designed to be suspended using the rigging accessory ETR2 in the horizontal orientation only. The ETR2 can be attached to an appropriate support using 1, 2 or all 3 of the 11 mm diameter holes on the main bracket.

The recessed, side-mounted fly track section on the MTDI 15b loudspeaker can be used with the PIONI single stud fitting to ring accessory for safety attachment to the MTDI 15b. This secondary rigging point shall not be used as the main rigging point. One PIONI is capable of withstanding the weight of one MTDI 15b with an ultimate safety factor of 12.

L-ACOUSTICS has engineered the MTDI 15b and its rigging accessory using state of the art modeling and calculation software. The ETR2 rigging accessory was also destructively tested to validate the final design using a pulling bench equipped with laboratory calibrated measuring cells.

L-ACOUSTICS hereby declares that the above products conform to:

1. **The Machinery Directive 98/37/CE**, Part 4: Lifting Accessories
2. **Low Voltage Directive 73/23/CE** (harmonized standard EN60065).

Established at Marcoussis, France, on the 2nd of March, 2004

Signature of L-ACOUSTICS representative:

A handwritten signature in black ink, appearing to read "J. Spillmann", written over a horizontal line.

Jacques Spillmann
Chief Engineer - Manufacturing