



## A15 WIDE - A15 FOCUS


Date : 05/2024

A15 KIT LIST


H STANDARD

| A15 WIDE/A15 FOCUS                               | DESCRIPTION   | A15_2F | A15_2W | A15_4F | A15_4W | A15_2W4F | A15_4W2F | A15_6W | A15_8W | A15_4W4F |
|--|---|--------|--------|--------|--------|----------|----------|--------|--------|----------|
| A15 WIDE   | 2-way passive constant curvature WST@ 30° enclosure: 15" LF+ 3" HF diaphragm  | 0      | 2      | 0      | 4      | 2        | 4        | 6      | 8      | 4        |
| A15 FOCUS  | 2-way passive constant curvature WST@ 10° enclosure: 15" LF + 3" HF diaphragm   | 2      | 0      | 4      | 0      | 4        | 2        | 0      | 0      | 4        |
| A15BUMP  | Flying frame for vertical deployment of A15 and KS21  | 0      | 0      | 0      | 0      | 2        | 2        | 0      | 0      | 2        |
| A15LIFT  | Rigging element for horizontal deployment of A15  | 0      | 0      | 0      | 2      | 0        | 2        | 4      | 4      | 2        |
| A15RIGBAR  | Rigging bar and pullback for A15 and KS21   | 0      | 0      | 0      | 0      | 0        | 0        | 0      | 0      | 0        |
| A-TLT  | Rigging element for stacking A15 and A10 onto KS21  | 0      | 0      | 2      | 0      | 2        | 0        | 0      | 0      | 2        |
| A-MOUNT  | Pole mount for A15 and A10  | 2      | 2      | 0      | 0      | 2        | 2        | 2      | 0      | 0        |
| KS21-OUTRIG                                      | Stability bars for KS21   | 0      | 0      | 2      | 0      | 2        | 0        | 0      | 0      | 2        |
| CLAMP250   | Clamp certified for 250 kg  | 0      | 0      | 0      | 0      | 2        | 0        | 0      | 0      | 0        |
| M-BAR  | Extension bar for rigging frame   | 0      | 0      | 0      | 0      | 0        | 0        | 0      | 0      | 0        |
| X-BAR  | Rigging bar for 1 enclosure   | 0      | 0      | 0      | 0      | 0        | 0        | 0      | 0      | 0        |
| LA-SLING2T                                       | 1m chain sling with two-leg bridles rated 2 tons  | 0      | 0      | 0      | 0      | 0        | 0        | 2      | 2      | 0        |
| <b>KS21 SYSTEM</b>                               | <b>DESCRIPTION</b>  |        |        |        |        |          |          |        |        |          |
| KS21   | High power compact subwoofer: 1x21"   | 2      | 2      | 4      | 4      | 6        | 6        | 6      | 8      | 8        |
| KS21-PLA   | Removable front dolly for 1 KS21  | 2      | 2      | 4      | 4      | 6        | 6        | 6      | 8      | 8        |
| KS21-COV   | Protective cover for 1 KS21   | 2      | 2      | 4      | 4      | 6        | 6        | 6      | 8      | 8        |
| KS21-CHARIOT                                     | Chariot for up to 3 KS21  | 0      | 0      | 0      | 0      | 0        | 0        | 0      | 0      | 0        |
| KS21-CHAROTCOV                                   | Protective cover for 2 or 3 KS21 on KS21-CHARIOT  | 0      | 0      | 0      | 0      | 0        | 0        | 0      | 0      | 0        |
| <b>AMPLIFIED CONTROLLERS</b>                     | <b>DESCRIPTION</b>  |        |        |        |        |          |          |        |        |          |
| LA4X   | Amplified controller with PFC 4 x 1000 W /8 Ohms. Ethernet network. AES/EBU   | 1      | 1      | 2      | 2      | 3        | 3        | 3      | 4      | 4        |
| L-CASE II  | 2U Electronics transport and protection case  | 1      | 1      | 2      | 2      | 3        | 3        | 3      | 4      | 4        |
| <b>CABLES</b>                                    | <b>DESCRIPTION</b>  |        |        |        |        |          |          |        |        |          |
| SP10   | Speaker cable: 4 x 4mm <sup>2</sup> NL4 10m length  | 0      | 0      | 0      | 0      | 0        | 0        | 0      | 0      | 0        |
| SP25   | Speaker cable: 4 x 4mm <sup>2</sup> NL4 25m length  | 2      | 2      | 4      | 4      | 6        | 6        | 6      | 8      | 8        |
| SP7  | Speaker cable: 4 x 4mm <sup>2</sup> NL4 0.7m length   | 0      | 0      | 0      | 0      | 0        | 0        | 0      | 0      | 0        |
| SP-Y1  | Y splits speaker cable: 2 x 2.5mm <sup>2</sup> NL4 1m length (with CC4FP adaptor)   | 2      | 2      | 4      | 4      | 6        | 6        | 6      | 8      | 8        |
| <b>TRAINING</b>                                  | <b>DESCRIPTION</b>  |        |        |        |        |          |          |        |        |          |
| TRAINING1Seat - System & Workflow                | Establish your role in the LAcoustics ecosystem and align your practice with the latest tools and state-of-the-art workflow, 1 seat | 2      | 2      | 2      | 2      | 2        | 2        | 2      | 2      | 2        |
| TRAINING1Seat - LAcoustics System Implementation | Advance your skills implementing a safe and functional LAcoustics system and prepare it for calibration, 1 seat                     | 2      | 2      | 2      | 2      | 2        | 2        | 2      | 2      | 2        |
| <b>SERVICE KIT A15</b>                           | <b>DESCRIPTION</b>  |        |        |        |        |          |          |        |        |          |
| G03407   | KR diaphragm A15FOCUS/WIDE  | 0      | 0      | 0      | 0      | 0        | 0        | 0      | 0      | 0        |
| G03411   | KR compression driver A15FOCUS/WIDE   | 0      | 0      | 0      | 0      | 0        | 0        | 0      | 0      | 0        |
| G03403   | KR loudspeaker 15" A15FOCUS/WIDE  | 0      | 0      | 0      | 0      | 0        | 0        | 0      | 0      | 0        |
| <b>SERVICE KIT KS21</b>                          | <b>DESCRIPTION</b>  |        |        |        |        |          |          |        |        |          |
| G03409   | KR loudspeaker 21" KS21   | 0      | 0      | 0      | 0      | 0        | 0        | 0      | 0      | 0        |


2 A15 Focus

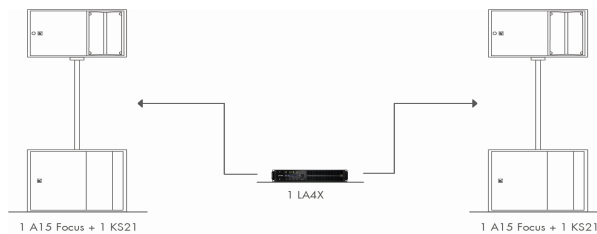


2 A15 Wide

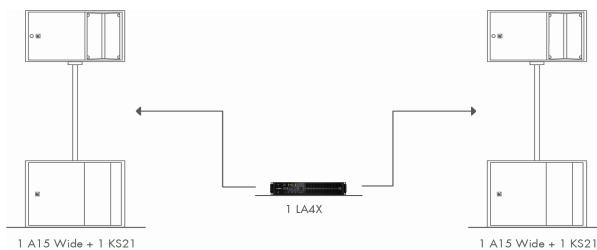


4 A15 Focus

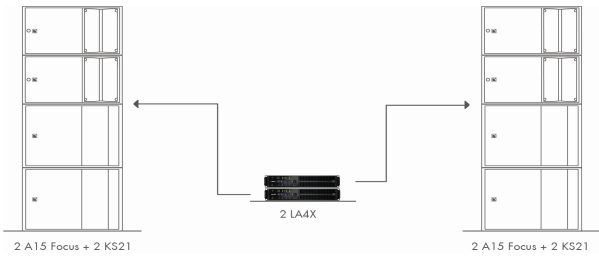


4 A15 Wide

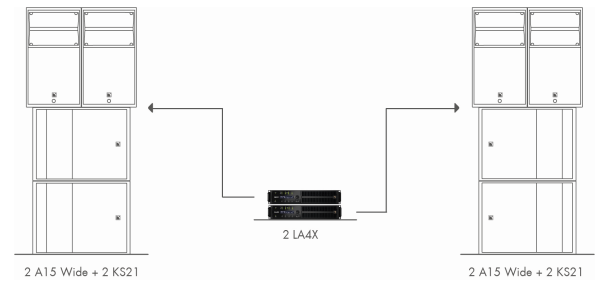


2 A15 Focus and 1 A15 Wide per side

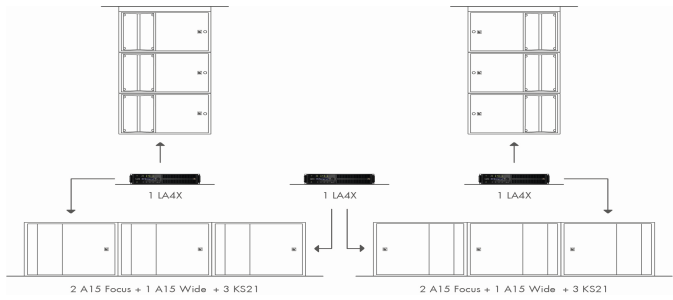


1 A15 Focus and 2 A15 Wide per side

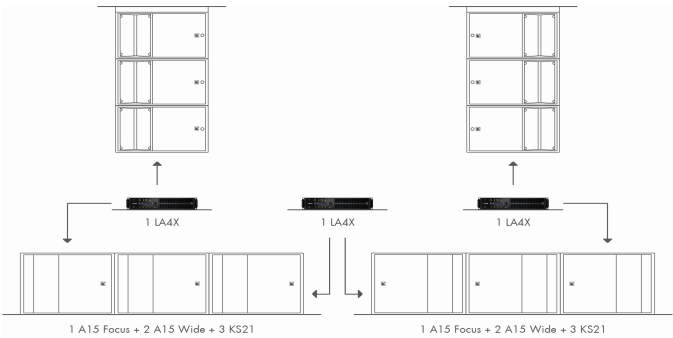

3 A15 Wide per side

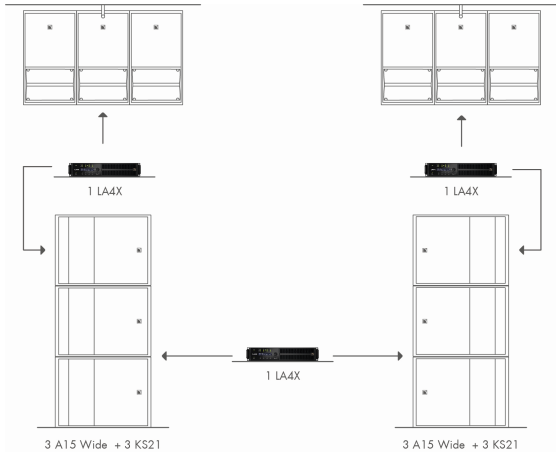

4 A15 Wide per side

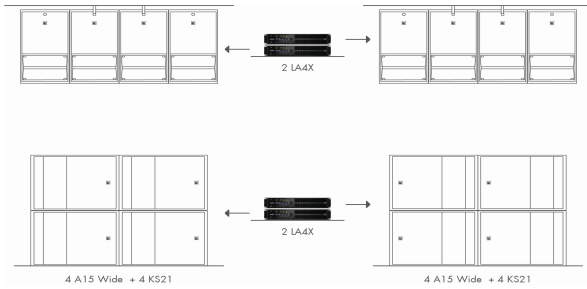

2 A15 Focus and 2 A15 Wide per side

