


A15i FOCUS MEDIUM THROW LINE SOURCE

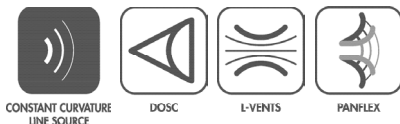

A15i Focus is the installation version of A15 Focus, purpose-built for medium throw installation applications. It delivers identical sonic performance to its touring counterpart in a discreet enclosure with streamlined mounting hardware for seamless integration.


With tightly controlled 10° vertical coverage, A15i Focus delivers up to 144 dB and projection up to 45 m. Combined with A15i Wide, it forms scalable vertical line sources with true line source behavior, while Panflex™ configurable directivity adapts horizontal coverage to the audience geometry. Two A15i Focus enclosures can also be configured with a 5° inter-element angle for increased SPL, greater throw and tighter vertical control.

A15i Focus can also be deployed individually as a configurable directivity point source for fills or delays. Its low-frequency contour delivers the impact of a large concert system, while KS21i extends bandwidth down to 29 Hz.


Compact, powerful and versatile, A15i Focus combines flexible coverage and deployment with a comprehensive range of installation accessories for theaters, houses of worship, clubs, convention centers and sports venues. EN 54-24 certification further extends its application scope to installations requiring certified voice alarm loudspeakers.

SPECIFICATIONS


Description	2-way passive constant curvature WST 10°, amplified by LA2Xi² / LA4X / LA8 / LA12X
Usable bandwidth (-10 dB)	41 Hz - 20 kHz ([A15])
Maximum SPL^{1,2}	144 dB ([A15])
Nominal directivity	Enclosure: 10° L-Fins: 70° / 110° symmetric or 90° asymmetric
Transducers	LF: 1 × 15" cone driver HF: 1 × 3" diaphragm neodymium compression driver
Acoustical load	LF: bass-reflex, L-Vents HF: DOSC waveguide, L-Fins
Nominal impedance	8 Ω
Connectors	4-point terminal block with push-in connection Connector sealing plate with cable gland
Rigging and handling	external rigging kits M6 inserts for rigging plates and accessories M8 inserts for A-U15i
Safety	1 DIN580-compatible M8 threaded insert
Weight (net)	32 kg / 71 lb
Cabinet	Premium grade Baltic beech and birch plywood
Front	Coated steel grill Acoustically neutral 3D fabric
Finish	Dark grey brown Pantone 426 C Pure white RAL 9010 Custom RAL code on special order
IP	IP55
Compliance	EN 54-24



Front



Side

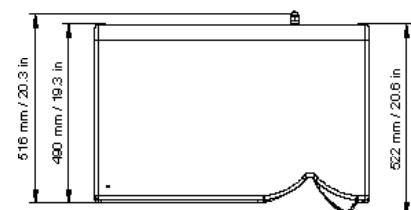


Top

¹ Peak level at 1 m under free field conditions using pink noise with crest factor 4 (preset specified in brackets).

² For Max SPL values using LA2Xi, refer to LA2Xi system specification sheet.

A15i WIDE MEDIUM THROW LINE SOURCE

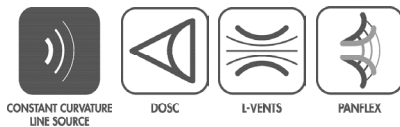

A15i Wide is the installation version of A15 Wide, purpose-built for medium throw installation applications. It delivers identical sonic performance to its touring counterpart in a discreet enclosure with streamlined mounting hardware for seamless integration.


With 30° vertical coverage, A15i Wide enables compact arrays to deliver expansive audience coverage while preserving sightlines. Combined with A15i Focus, it forms scalable vertical line sources with true line source behavior, while Panflex™ configurable directivity adapts horizontal coverage to the audience geometry.

A15i Wide can also be deployed individually as a configurable directivity point source for mains, fills or delays, or deployed radially for broad horizontal coverage as a main system or center cluster. Its low-frequency contour delivers the impact of a large concert system, while KS21i extends bandwidth down to 29 Hz.


Compact, powerful and versatile, A15i Wide combines scalable deployment and configurable coverage with a comprehensive range of installation accessories for theaters, houses of worship, clubs, convention centers and sports venues. EN 54-24 certification further extends its application scope to installations requiring certified voice alarm loudspeakers.

SPECIFICATIONS


Description	2-way passive constant curvature WST 30°, amplified by LA2Xi² / LA4X / LA8 / LA12X
Usable bandwidth (-10 dB)	42 Hz - 20 kHz ([A15])
Maximum SPL^{1,2}	141 dB ([A15])
Nominal directivity	Enclosure: 30° L-Fins: 70° / 110° symmetric or 90° asymmetric
Transducers	LF: 1 x 15" cone driver HF: 1 x 3" diaphragm neodymium compression driver
Acoustical load	LF: bass-reflex, L-Vents HF: DOSC waveguide, L-Fins
Nominal impedance	8 Ω
Connectors	4-point terminal block with push-in connection Connector sealing plate with cable gland
Rigging and handling	external rigging kits M6 inserts for rigging plates and accessories M8 inserts for A-U15i
Safety	1 DIN580-compatible M8 threaded insert
Weight (net)	29 kg / 64 lb
Cabinet	Premium grade Baltic beech and birch plywood
Front	Coated steel grill Acoustically neutral 3D fabric
Finish	Dark grey brown Pantone 426 C Pure white RAL 9010 Custom RAL code on special order
IP	IP55
Certification	EN 54-24



Front



Side

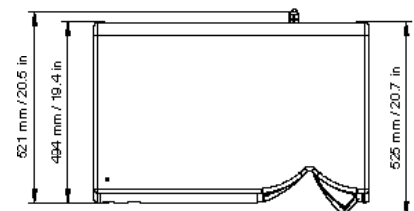

Top

¹ Peak level at 1 m under free field conditions using pink noise with crest factor 4 (preset specified in brackets).

² For Max SPL values using LA2Xi, refer to LA2Xi system specification sheet.