

K3i LONG THROW LINE SOURCE FOR INSTALL



K3i is the installation version of K3, designed for long-throw installation applications. K3i shares identical sonic performance with its touring counterpart but features a sleeker design and streamlined mounting hardware fitting integration requirements.

Housing the internationally recognized K2 performance into a compact enclosure, K3i is ideal for medium to large-scale venues that require premium-tour sound and limited footprint, such as large concert halls, clubs, congress centers and sport venues.


Inter-element angles and Panflex™ for user-adjustable horizontal directivity enable integrators, consultants and sound designers to precisely tailor the array coverage to any audience geometry.

Requiring only two channels of amplification, K3i is a high value solution that provides large-format concert sound in compact and lightweight construction to facilitate most integration scenarios. K3i is highly weather-resistant as standard and can be color-matched to melt into any venue decor, indoor or outdoor.




SPECIFICATIONS


Description	2-way active WST enclosure, amplified by LA4X / LA8 / LA12X
Usable bandwidth (-10 dB)	42 Hz - 20 kHz ([K3_70])
Maximum SPL¹	143 dB ([K3_70])
Nominal directivity	Vertical : depending on number of elements and array curvature Horizontal : 70° / 110° symmetric or 90° asymmetric
Transducers	LF: 2 x 12" neodymium cone driver HF: 1 x 4" diaphragm neodymium compression driver
Acoustical load	LF: Bass-reflex, L-Vents HF: DOSC waveguide, Panflex
Nominal impedance	LF / HF : 8 Ω / 8 Ω
Connectors	4-point terminal block with push-in connection Connector sealing plate with cable gland
Rigging and handling	External rigging kits M6 inserts for rigging plates and accessories Inter-enclosure angles [deg]: 0, 1, 2, 3, 4, 5, 7.5, 10
Weight (net)	35 kg / 77 lb
Cabinet	Premium grade Baltic birch plywood
Front	Coated steel grill Acoustically neutral 3D fabric
Rigging components	High grade steel with anti-corrosion coating
Finish	Dark grey brown Pantone 426 C Pure white RAL 9010 Custom RAL code on special order
IP	IP55

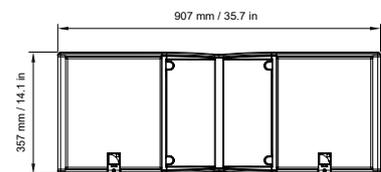

Front



Side

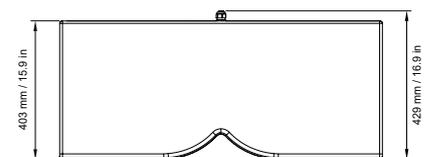

Top

¹ Peak level at 1 m under free field conditions using pink noise with crest factor 4 (preset specified in brackets).