



L2

Date : 05/2024




LONG THROW L SERIES CONFIGURATION AND KIT LIST


L2 KIT LIST

L2 SYSTEM	DESCRIPTION	2 L2D	2 L2 4 KS28	2 L2 2 L2D 8 KS28	L STANDARD	
					4 L2 2 L2D 12 KS28	6 L2 2 L2D 16 KS28
L2	16-channel active progressive curvature WST® 10° enclosure	0	2	2	4	6
L2D	16-channel active progressive curvature WST® 60° enclosure	2	0	2	2	2
L2-CHARIOT	Chariot for one L2	0	2	2	4	6
L2-CHARIOTCOV	Protective cover for 1 L2 on L2-CHARIOT	0	2	2	4	6
L2-CHARIOTLID	Protective lid for L2	0	2	2	4	6
L2D-CHARIOT	Chariot for one L2D	2	0	2	2	2
L2D-CHARIOTCOV	Protective cover for 1 L2D on L2D-CHARIOT	2	0	2	2	2
L2D-CHARIOTLID	Protective lid for L2D	2	0	2	2	2
L2-BUMP	Flying frame for L2 and L2D (includes BPCCHAIN1.5T)	2	2	2	2	2
L2-BAR	Extension bar for L2-BUMP	2	2	2	2	2
LA-RAKMOUNT	Mounting cradles for 1 LA-RAK	0	0	2	2	2
L2-LASERMOUNT	Lasermount for L2 and L2D (compatible TEQSAS / SSE ProSight / Align Array)	2	2	2	2	2
L2-RIGBAR	Rigging bar and pullback for L2 and L2D	2	2	2	2	2
L2-BUMPFLIGHT	Modular flight case for 1 L2-BUMP and rigging elements	1	1	2	2	2
L2-BUMPFLIGHTADDLAYER	L2-BUMPFLIGHT extension for one additional L2-BUMP	1	1	0	0	0
L2-ROLL	Lift and roll accessory for L2 and L2D (to be used with L2-RIGBAR)	1	1	1	1	1
K2-JACK	4 tilt adjustment screw jacks + bar for K2-CHARIOT	2	2	2	2	2
CLAMP1000	Panning clamp certified for 1000 kg / 2205 lb (includes panning base and m	0	0	2	2	2
KS28	DESCRIPTION					
KS28	Flyable subwoofer 2 x 18"	0	4	8	12	16
KS28-PLA	Removable front dolly on wheels for 1 x KS28	0	4	8	12	16
KS28-COV	Protective cover for 1 x KS28	0	4	8	12	16
KS28-CHARIOT	Chariot for up to 4 x KS28	0	0	0	0	0
KS28-CHARIOTCOV	Protective cover for 3 or 4 x KS28 on KS28-CHARIOT	0	0	0	0	0
DRIVE SYSTEM	DESCRIPTION					
LA-RAK III	Touring rack III (9U with 3 LA7.16, 2 LS10 and signal and power distribution p	0	0	2	2	2
LA-RAK II AVB	Touring rack AVB (9U with 3 LA12X/2 LS10 and signal and power distributi	0	0	0	2	2
LA7.16	Amplified controller 16 x 1300 W / 8 Ohms	2	2	0	0	2
LA12X	Amplified controller 4 x 2600W/4 ohms	0	2	2	0	0
POW2	32A Power Link 2m	0	0	2	4	4
P1	Digital audio processor and measurement platform: 20 x 18 mic/line AES/EBU	0	0	1	2	2
LS10	10-port AVB Switch	0	0	2	4	4
LS10 RAKSHELF	1U Rack Shelf for two LS10	0	0	1	2	2
L-CASE II	2U Electronics transport and protection case	2	4	2	0	2
CABLES	DESCRIPTION					
DOE2	Dual AVB network cable CAT6A: etherCON 2m length	1	2	4	4	6
DOE45	Dual AVB network cable CAT6A: etherCON 45m length	1	1	1	1	1
DOE100	Dual AVB network cable CAT6A: etherCON 100m length	1	1	1	1	1
DO.7	Speaker cable: 8 x 4mm² CA-COM 0.7m length	0	0	0	0	0
DO25	Speaker cable: 8 x 4mm² CA-COM 25m length	0	2	2	4	4
DOSUB-LA8	Speaker cable breakout for passive enclosures CA-COM > 4 NL2 length 5m	0	2	2	4	4
SC32-5	Speaker cable: 32 x 1.5mm² 5m length	0	0	0	0	0
SC32-10	Speaker cable: 32 x 1.5mm² 10m length	0	0	0	0	0
SC32-25	Speaker cable: 32 x 1.5mm² 25m length	2	2	6	6	8
SC32-50	Speaker cable: 32 x 1.5mm² 50m length	0	0	0	0	0
BOB32	Breakout box: SC32 to 2 x CA-COM + 8 x NL4	0	0	2	2	2
TRAINING	DESCRIPTION					
SEMINAR1Seat - System Engineer	Includes Soundvision, Drive System and M1-P1 Measurement & Tuning courses. Manage a project from design through calibration to operation	0	0	0	2	2
TRAININGSession - System & Workflow	Establish your role in the L-Acoustics ecosystem and align your practice with the latest tools and state-of-the-art workflow, up to 12 seats	1	1	1	1	1
TRAININGSession - L-Acoustics System Implementation	Advance your skills implementing a safe and functional L-Acoustics system and prepare it for calibration, up to 12 seats	1	1	1	1	1
TRAININGSession - L2 System	Recognize the standard configurations of the benchmark L2 system and gain hands-on experience rigging and listening to them, up to 12 seats	1	1	1	1	1
SHOW SUPPORT	Show support (per day)	0	0	0	2	2
TRAVEL-MEDIUM	Medium haul travel meals and lodging	1	1	1	1	1
TOOLKIT	DESCRIPTION					
TECH TOOLCASE II	System technician tool case fully loaded	1	1	1	1	1
MAINTENANCE TOOLCASE	Maintenance tool case fully loaded	0	0	0	1	1
SERVICE STARTER KIT L2	DESCRIPTION					
G03650	KR diaphragm 3" L2(D)	2	2	2	2	2
G03646	KR compression driver 3" L2(D)	2	2	2	2	2
G03647	KR loudspeaker 10" L2(D)	2	2	2	2	2
G03645	KR loudspeaker 12" L2(D)	2	2	2	2	2
KR PIN1542	KR ball-locking pin L2(D)-BAR	1	1	1	1	1
SERVICE STARTER KIT KS28	DESCRIPTION					
G03229	KR speaker KS28	0	1	2	2	2
KR SECUGRL	Kit 100 safety O-rings for front grill	0	1	1	1	1

2 L2D

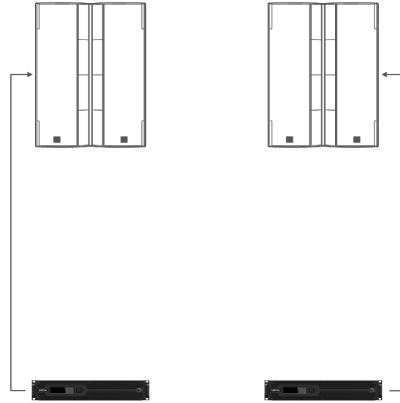


2 L2 & 4 KS28

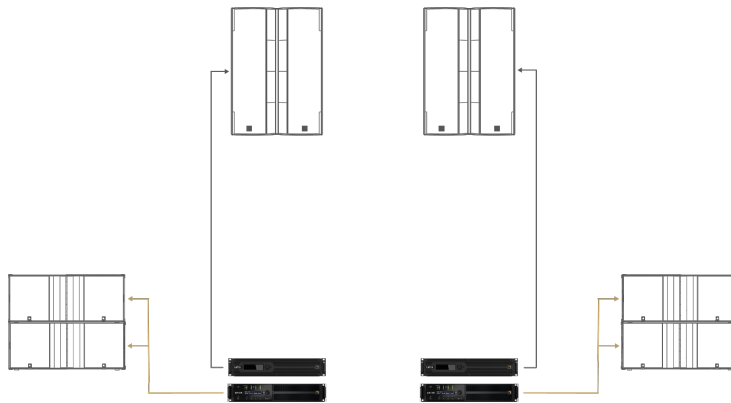


2 L2 & 2 L2D & 8 KS28



4 L2 & 2 L2D & 12 KS28 (L STANDARD)

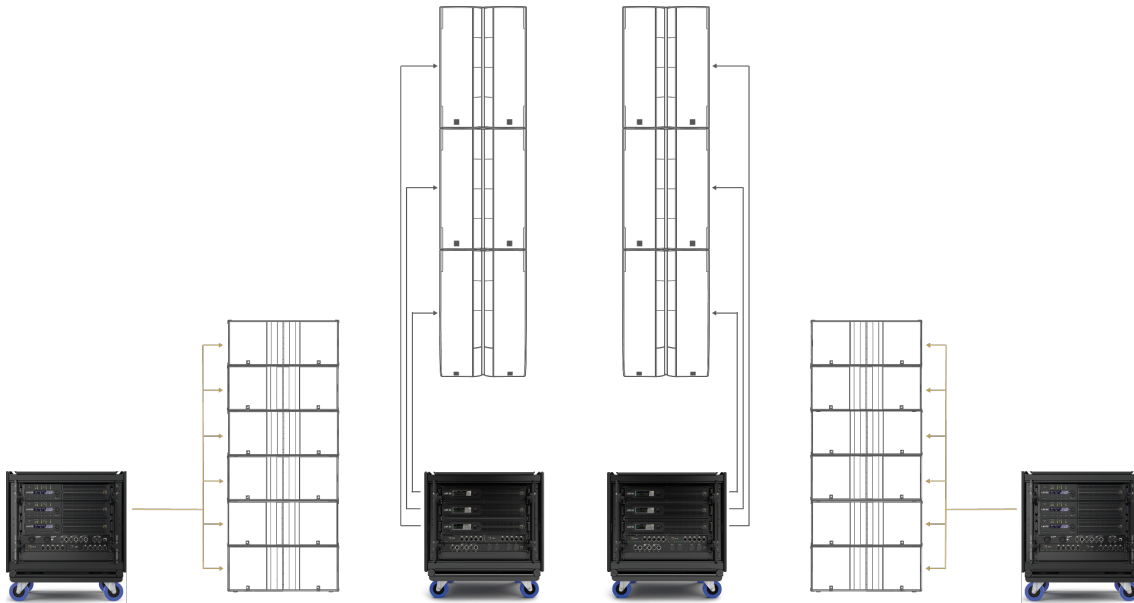

6 L2 & 2 L2D & 16 KS28 (L STANDARD)

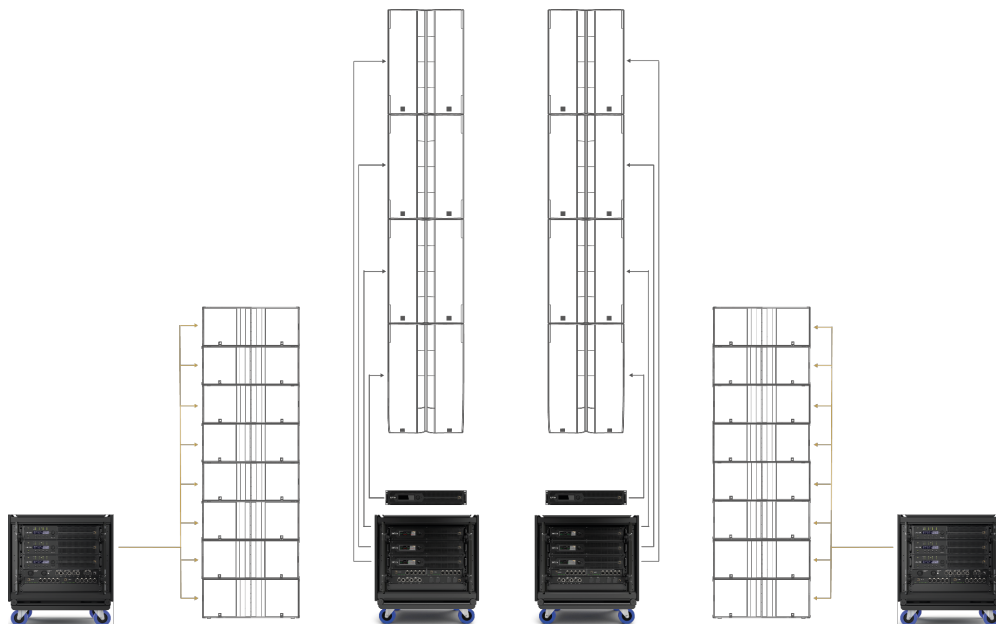

AVB CONNECTIONS FOR AUDIO AND CONTROL

4 L2 2 L2D and 6 KS28

