

PRELIMINARY



# SB 18 Ili SUBWOOFER



<b>Description</b>	High power compact subwoofer: 1 × 18" amplified by LA2Xi <sup>2</sup> / LA4X / LA8 / LA12X
<b>Usable bandwidth (-10 dB)</b>	32 Hz - 110 Hz ([SB18_100])
<b>Maximum SPL<sup>1,2</sup></b>	138 dB ([SB18_100])
<b>Nominal directivity</b>	Standard or cardioid configurations
<b>Transducers</b>	1 × 18" cone driver
<b>Acoustical load</b>	Dual bass-reflex, L-Vents
<b>Nominal impedance</b>	8 Ω
<b>Connectors</b>	4-point terminal block with push-in connection Connector sealing plate with cable gland
<b>Rigging and handling</b>	External rigging kits M6 inserts for rigging plates and accessories
<b>Weight (net)</b>	48 kg / 106 lb
<b>Cabinet</b>	Premium grade Baltic birch plywood
<b>Front</b>	Coated steel grill Acoustically neutral 3D fabric
<b>Rigging components</b>	High grade steel with anti-corrosion coating
<b>Finish</b>	Dark grey brown Pantone 426 C Pure white RAL 9010 Custom RAL code on special order
<b>IP</b>	IP55

<sup>1</sup> Peak level at 1 m under half space conditions using pink noise with crest factor 4 (preset specified in brackets).  
<sup>2</sup> For Max SPL values using LA2Xi, refer to LA2Xi system specification sheet.

## ISOCONTOUR

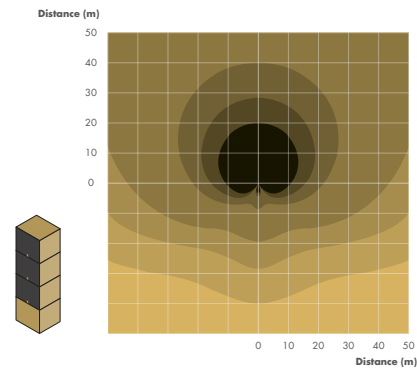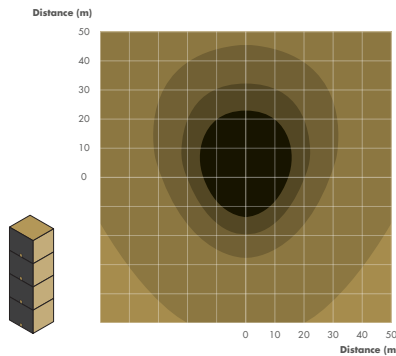

► SPL mapping of a block of four SB18 Ili in standard (left) and cardioid (right) arrangements, using surfaces of equal sound pressure with three dB step colored scale.

## DIMENSIONS

