


SB6 ULTRA-SHALLOW SUBWOOFER

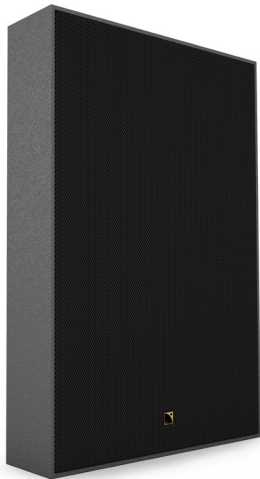

L-VENTS

Description	Ultra-shallow subwoofer: 2 x 6,5" amplified by LA7.16i / LA2Xi / LA4X / LA12X		
	Preset [SB6_60]	Preset [SB6_100]	Preset [SB6_200]
Low frequency limit (-10 dB)	29 Hz	29 Hz	32 Hz
Maximum SPL^{1,2}	110 dB	111 dB	115 dB
Nominal directivity	Standard		
Transducers	2 x 6.5" neodymium cone driver		
Acoustical load	Bass-reflex, L-Vents		
Nominal impedance	4 Ω		
Connectors	4-point terminal block with push-in connection and connector sealing plate		
Rigging and handling	SB6i: 8 x M6 inserts for on-wall and on-ceiling accessories (SB6i-onCW) and safety SB6r inWall / inCeiling / inTile recessed versions		
Weight (net)	8,6 kg / 19 lb		
Cabinet	Premium grade Baltic beech and birch plywood		
Front	Coated steel grill Acoustically neutral 3D fabric		
Finish	Dark grey brown Pantone 426 C Pure white RAL 9010 Custom RAL code on special order		
IP	IP55		


¹ Peak level at 1 m under half space conditions using pink noise with crest factor 4 (preset specified in brackets).

² For Max SPL values using LA2Xi, refer to LA2Xi system specification sheet.

INTEGRATION




▶ SB6i
with SB6i-onCW accessory




▶ SB6r inWall
▶ SB6r inCeiling
▶ SB6r inTile

DIMENSIONS



Front



Side