

X8i SHORT THROW LOUDSPEAKER FOR INSTALL



- Pristine studio sound
- Exceptional bandwidth-to-size ratio
- EN 54-24 Certified
- Wide directivity with consistent off-axis response
- Clear low frequency power with L-Vents
- Weather resistant IP55



POINT SOURCE




COAXIAL



L-VENTS

ELECTRO-ACOUSTICS

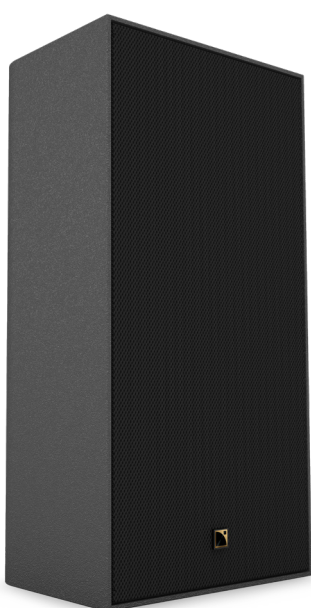

X8i is a coaxial system designed for short throw installation applications that require discretion, elegance, and power. Its slender, streamlined design facilitates integration into high-end architectural settings, where it delivers clear, studio-like sound.

The passive loudspeaker features a 1.5" neodymium compression driver coaxially loaded by an 8" low-frequency transducer in a bass-reflex cabinet. This coaxial arrangement produces 90° axisymmetric directivity with a smooth tonal response free of secondary lobes over the entire frequency range.

X8i can be driven by two presets to adapt to the acoustic requirements of different projects and subwoofer coupling configurations. For strong vocal reinforcement or when used alongside a subwoofer, the X8i preset delivers 129 dB max SPL down to 67 Hz. For standalone applications and close-proximity listening, the X8i_40 preset extends the frequency response down to 43 Hz and delivers 123 dB max SPL.

The combination of pristine yet powerful sound and elegant form makes X8i ideal for vocal or musical reinforcement in small theaters, live clubs, luxury and hospitality spaces, houses of worship, residential and yacht applications, and broadcast and recording studios. With EN 54-24 certification, X8i is also suitable for voice alarm applications, extending its combination of sound performance and discreet architectural integration to projects with life safety requirements.

PHYSICAL

The X8i cabinet is constructed of premium grade Baltic birch and beech plywood to ensure maximum acoustical and mechanical integrity. The slender enclosure weighs 11 kg / 24 lb and houses all mounting points and terminal block connectors at the rear of the loudspeaker leaving all other faces discrete and elegant.

The cabinet is designed to offer monitoring orientations, with three natural angles: 0°, 35°, and 55° with regard to vertical.

The large set of installation-friendly accessories offers a premium integration solution, reinforced by the RAL custom-colored program to blend into all types of decor.


The weatherized X8i features terminal connectors behind a connector sealing plate, enabling it to reach an IP55 rating, making it ideal for outdoor operation.




Sleek and discrete design with all mounting points and speaker connectors at the rear

APPLICATIONS


Coaxial loudspeakers generate a wide conical directivity pattern with excellent spatialization and no minimum listening distance. The coaxial technology and the combination of power and bandwidth make X8i ideal for most short throw applications, from the main system in a small House of Worship, to fill enclosures in small to medium theaters. The elegant X8i enclosure and the multiple mounting options also offer a discrete and premium solution for hospitality settings, in live clubs, home & yacht, or studios.

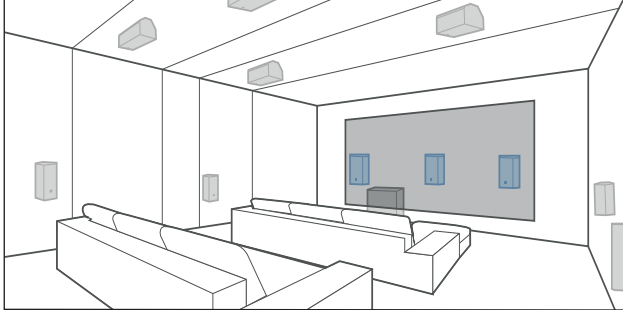


Main system in home cinema setting

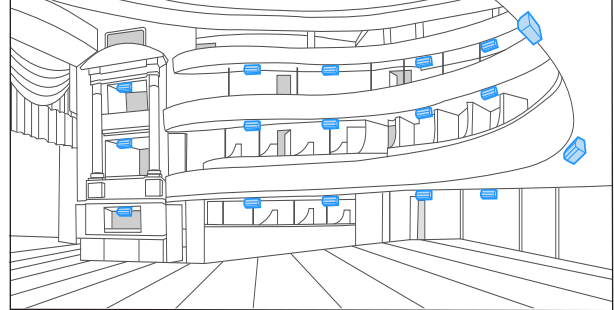

Distributed fill system in theaters or performing art centers

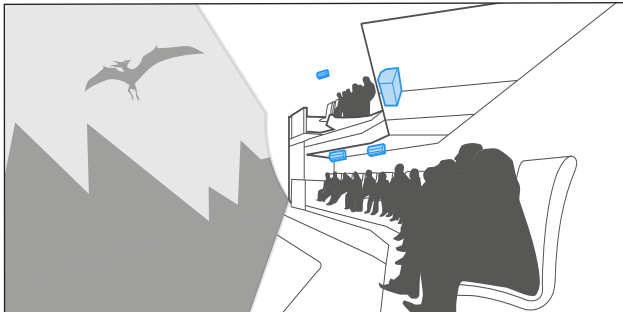


Main or fill system in theme parks

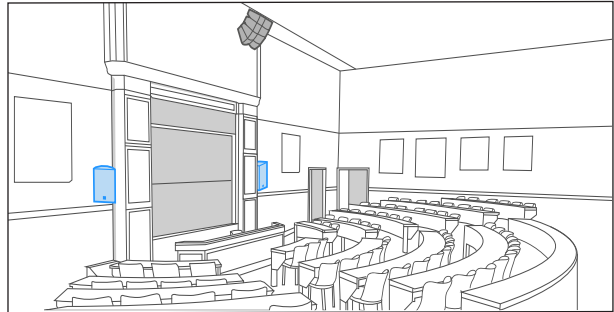

Fill system in lecture halls

RIGGING

X8i can be mounted on the wall vertically or horizontally with silent blocks to prevent structural vibration that can result in unwanted noise transmission. Specific accessories allow for Pan and Tilt orientation, ground stacking, or even pole mounting.

ON-WALL	ON-CEILING / ON-WALL	MISC
 X8i-onCW On-Ceiling/Wall mounting with silent blocks	 X8i-HBAR On-ceiling mounting	 CEILING-PENDANT
 WALLx2 Wall-mounting without silent blocks	 VBAR On-ceiling mounting (Can be combined with TILTs accessories)	 GROUND / GROUND35 / GROUND55 Ground mounting
 TILT / TILT5 / TILT15 / TILT40 On-wall mounting (Requires TILT-SUPPORT accessory)	 PAN On-wall mounting (Requires TILT-SUPPORT accessory)	 POLE + SPCON Pole mounting + speakON adapter
		 PAN + TILT On-wall mounting (Requires TILT-SUPPORT accessory)

AMPLIFIED CONTROLLERS

LA2Xi and LA4X are the recommended amplified controllers with one or two X8i per output channel. For multi-channel configurations, LA7.16i offers the most efficient amplification solution.

Amplified controllers	LA7.16i	LA2Xi	LA4X	LA12X
Front and back panels				
Install / Touring	Install	Install	Install / Touring	Install / Touring
In x Out	16 x 16	4 x 4 / 4 x 3 / 4 x 2 / 4 x 1	4 x 4	4 x 4
Output power (W RMS) @ 16 ohms @ 8 ohms @ 4 ohms @ 2.7 ohms	16 x 700 W 16 x 1300 W 16 x 1100 W	4 x 200 W 4 x 360 W 4 x 640 W	4 x 1000 W 4 x 1000 W	4 x 1400 W 4 x 2600 W 4 x 3300 W
Height	2U	1U	2U	2U
Weight	14.5 kg / 32 lbs	4.40 kg / 9.70 lbs	11.3 kg / 24.9 lbs	14.5 kg / 32 lbs
Drive capability				
Max. number of enclosures per channel	1	2	2	3
Max. number of enclosures per amplifier	16	8	8	12
Max SPL (Preset X8i)	129 dB	125 dB	129 dB	129 dB

SUBWOOFER

Syva Sub: compact subwoofer (1 x 12")

Syva Sub + X8i: 27 Hz – 20 kHz
Max SPL of X8i preset is 129 dB
Ratio of 1 subwoofer to 1 X8i
Contour reinforced by 10 dB at 50 Hz



SB10: ultra-compact subwoofer (1 x 10")

SB10 + X8i_40: 27 Hz – 20 kHz
Max SPL of X8i_40 preset is 123 dB
Ratio of 1 subwoofer to 1 X8i
Contour reinforced by 10 dB at 50 Hz



SOFTWARE

SOUNDVISION: simulation software



3D electro-acoustic &
mechanical simulation software

LA Network Manager: control & monitoring software



Real-time control and
monitoring up to 253 units
Multiple network topologies

Xi series: Elegance and performance for premium installations



The Xi Series is a range of installation-focused coaxial enclosures with distinct formats, bandwidth, SPL and coverage angles adapted to short throw applications. With pristine sound quality and discreet design, the Xi Series integrates elegantly in venues in search of natural and powerful sound.




Coaxial technology allows for a compact design and constant tonal balance over distance, giving the Xi Series smooth coverage for off-axis audiences, no minimum listening distance and high feedback rejection.

COVERAGE


About coaxial technology

In 1989, L-Acoustics introduced the first coaxial loudspeaker enclosure for professional sound reinforcement, bringing studio quality to near-field applications for the first time. Since then, coaxial technology has been implemented in all L-Acoustics point sources.

A coaxial design approach aligns LF and HF acoustic centers to achieve a single point source radiation with coherent wavefront at all frequencies, that is free of polar lobing effects, typical of traditional horn and woofer combinations. This results in natural, studio monitor sound quality, ideal for proximity use.

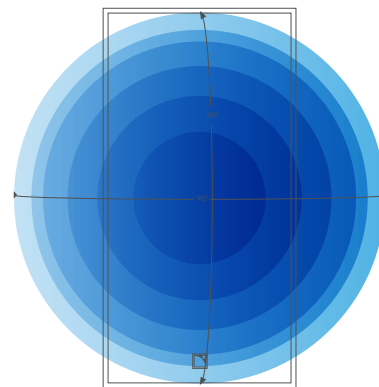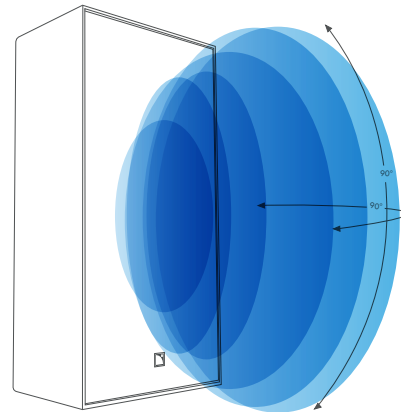


BEAMWIDTH

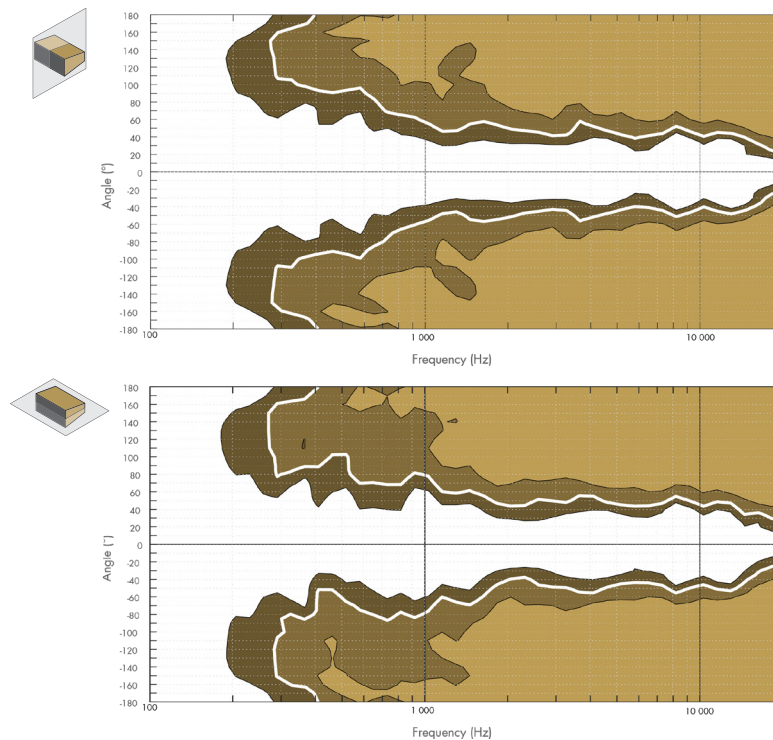

► Dispersion angle diagram of a single X8i in vertical (top) and horizontal (bottom) plane using lines of equal sound pressure at -3 dB, -6 dB, -12 dB.

X8i SHORT THROW LOUDSPEAKER FOR INSTALL

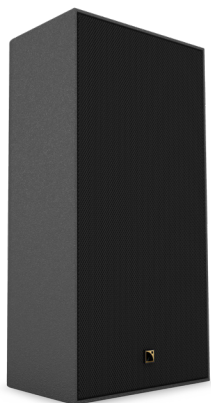

X8i is a point source system designed for short throw installation applications. Part of the Xi Series, X8i is an 8" format loudspeaker that provides high output, broad bandwidth, and immaculate sound in an elegant and discreet enclosure.

X8i is a two-way passive enclosure with transducers mounted coaxially to produce 90° axisymmetric directivity with a smooth tonal response free of secondary lobes over the entire frequency range. X8i can be used with two dedicated presets, one focused on bandwidth and the other on SPL.

The combination of a streamlined design, a wide range of accessories, the RAL custom-color program, IP55 rating, and EN 54-24 certification enables X8i to integrate into a wide range of indoor and outdoor environments, including voice alarm applications.

On its own, X8i is ideal for vocals or as a complement to larger systems for fill applications in performing arts centers, houses of worship, corporate facilities, and studios.

Supplemented by a subwoofer, the combination of pristine yet powerful sound and elegant form makes X8i ideal for musical reinforcement in small theaters, live clubs, luxury and hospitality spaces, residential and yacht applications, broadcast and recording studios, or as the main system in a home cinema setting.


SPECIFICATIONS

Description	2-way passive coaxial enclosure amplified by LA7.16(i) / LA2Xi / LA4X / LA12X	
Preset	[X8i_40]	[X8i]
Usable bandwidth (-10 dB)	43 Hz - 20 kHz	67 Hz - 20 kHz
Maximum SPL ^{1,2}	123 dB	129 dB
Nominal directivity (-6 dB)	90° axisymmetric	
Monitor angle ³	35° / 55°	
Transducers	LF: 1 x 8" HF: 1 x 1.5" neodymium compression driver	
Acoustical load	Bass-reflex, L-Vents	
Nominal impedance	8 Ω	
Connectors	4-point terminal block with push-in connection and connector sealing plate	
Rigging and handling	8 M6 inserts	
Weight (net)	11 kg / 24 lb	
Cabinet	Premium grade Baltic birch and beech plywood	
Front	Steel grill with anti-corrosion coating	
Finish	Dark grey brown Pantone 426C Pure white RAL 9010 Custom RAL code on special order	
IP	IP55	
Certification	EN 54-24	


¹ - Peak level at 1 m under free field conditions using pink noise with crest factor 4 (preset specified in brackets).

² - For Max SPL values using LA2Xi, refer to LA2Xi system specification sheet.


³ - With regard to vertical



Front



Side



Top

SB 10 ULTRA-COMPACT SUBWOOFER



Description	Ultra compact subwoofer: 1 x 10" amplified by LA7.16i / LA2Xi / LA4X / LA12X		
	Preset [SB10_60]	Preset [SB10_100]	Preset [SB10_200]
Low frequency limit (-10 dB)	25 Hz	27 Hz	29 Hz
Maximum SPL ^{1,2}	119 dB	122 dB	124 dB
Nominal directivity	Standard		
Transducers	1 x 10" cone driver		
Acoustical load	Bass-reflex, L-Vents		
Nominal impedance	8 Ω		
Connectors	4-point terminal block with push-in connection and connector sealing plate		
Rigging and handling	SB10i: 12 x M6 inserts for on-wall and on-ceiling accessories (SB10i-onCW) SB10r inWall / inCeiling / inTile recessed versions		
Weight (net)	14 kg / 31 lb		
Cabinet	Premium grade Baltic birch plywood		
Front	Coated steel grill Acoustically neutral 3D fabric		
Finish	Dark grey brown Pantone 426 C Pure white RAL 9010 Custom RAL code on special order		
IP	IP55		

¹ Peak level at 1 m under half space conditions using pink noise with crest factor 4 (preset specified in brackets).

² For Max SPL values using LA2Xi, refer to LA2Xi system specification sheet.



► SB10i on the ground





► SB10i
with SB10i-onCW accessory



► SB10r inWall
► SB10r inCeiling
► SB10r inTile

DIMENSIONS



Bottom

SYVA SUB PERFORMANCE ART



► Vertical



► Horizontal



► Syva + Syva Sub



Description	Infra low frequency subwoofer: 1 x 12" amplified by LA7.16(i) / LA2Xi ² / LA4X / LA12X	
	Preset ([SYVA SUB_100])	Preset ([SYVA SUB_200])
Low frequency limit (-10 dB)	27 Hz	29 Hz
Maximum SPL ¹	128 dB	130 dB
Nominal directivity	Standard	
Transducers	1 x 12" cone driver	
Acoustical load	Bass-reflex, L-Vents	
Nominal impedance	8 Ω	
Connectors	IN: 4-point speakON® AutoConnect	
Weight (net)	27 kg / 60 lb	
Cabinet	First grade Baltic beech and birch plywood	
Front	Steel grill with anti-corrosion coating Acoustically neutral 3D fabric	
Finish	Fine grain dark grey brown Pantone 426C Pure white RAL 9010 Custom RAL code on special order	
IP	IP55	

¹ Peak level at 1 m under half space conditions using pink noise with crest factor 4 (preset specified in brackets).

² For Max SPL values using LA2Xi, refer to LA2Xi system specification sheet.

DIMENSIONS

